

FX 3300-EXT-IX
SHORT VERSION SIDE SEAM AUTOMAT



HEAD OFFICE

Basin Expres Yolu Mehmet Akif Mah. Bahariye Cad. No:105
34303 K.Çekmece / İSTANBUL / TURKEY
Tel: +90 212 472 01 01
Fax: +90 212 612 79 65


FACTORY

Konya Ankara Yolu. Havaalanı Kavşağı
No: 213
42100 Selçuklu / KONYA
Tel: +90 332 358 01 01
Fax: +90 332 358 09 00



FX 3300 - EXT - IX

SHORT VERSION SIDE SEAM AUTOMAT

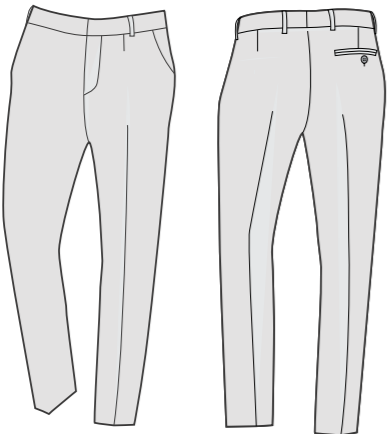

FX 3300-EXT-IX



FX 3300-EXT-IX



FX 3300-EXT-IX



FX 3300-EXT-IX



FX 3300-EXT-IX



FX 3300-EXT-IX



FX 3300-EXT-IX

Max. Sewing Speeds : 6.000 r.p.m
Max. Stitch Length : 1 or 3,8 mm

Connection Voltage:
Single-Phase A.C. 230 V, 50/60 Hz

Air Pressure : 6 bar

FX 3300 - EXT - IX

SHORT VERSION SIDE SEAM AUTOMAT

The sewing unit FX 3300 -EXT-IX is the economy version for sewing side seams and inseams. The compact design is especially suitable for the universal use in the production of sportswear trousers. Due to the pneumatically moveable edge guide it is possible to trim the excess lengths of pocket bags.

With edge guide pneumatically moveable edge guide (Zippy). For trimming the extra lengths of pocket bags in sportswear trousers. The new control panel with touch screen and colour graphic display simplifies the programming considerably and allows a quick access to all parameters while programming and sewing. Sewing unit FX 3300-EXT-IX is the economy version of class FX 4 300-EXT-IX without preparation table. It is not only suitable for the production of classic trousers but also for casual wear, as e. g. cotton trousers, "Dockers", "Chinos" and "US-Style" trouser

TECHNICAL SPECIFICATIONS

- Sewing head: Pegasus EXT 3216-03
- Integrated Eka 550 W Mini Stop DC Servo Sewing Motor
- Short table, Machine frame with adjustable height providing the possibility of working from the front
- Beijer , Windows Based 256 Million Colour Supported Touch screen with colour graphic display for easy operation and quick access to modifiable parameters
- Easy to use, with Pictures on the Operator Panel and with 50 Different Programming
- Top palette carrier with step engine controller moving the work to the stacker
- Guide attachment for contours (Zippy)
- Vertical cutter with suction device
- Chain separator with suction device
- Feature to operate with all sides in order/cycle programming
- PLC Control Unit
- Thread cutting and suction at stitch beginning and end
- Air blowing units over the counter provides the easy flow of fabric to the back
- Pneumatic fabric holding piston guiding the work flow to the stacker
- Graphic program for using the lower-upper fullness on desired places
- Constant seam width due to precise contour guidance (Zippy)
- Perfect fit due to partial fullness operation in the upper and lower material ply with step motor control
- Equipment for manual sewing in the hip curve section (when processing side seam pockets and wing pockets)
- Special sewing set for trousers side seams with side seam pockets
- Closing and serging can be executed in one operation
- Very easy programming more flexibility
- Universal Stacking (Standard)
- Control, freely programmable
- Blowing nozzles in the table top for facilitating the material feed
- Yarn waste compartment

OPTIONS

- Universal Stacking
- Automatic fullness operation by Step motor controlled top and bottom feed.
- Perfect fit due to partial fullness operation in the upper and lower material ply.

PERFORMANCE

480. min. approximately 1.400 pieces side edge or edge between legs

DIMENSIONS

- Length : 85 cm
- Width : 105 cm
- Height : 120 cm
- Packing Size : 127 cm x 89 cm x 145 cm
- Machine Net Weight : approx. 120 kg
- Machine Gross Weight : approx. 145 kg