

OZ 5300 - IX
JACKET and TROUSER POCKET FACINGS AUTOMAT



HEAD OFFICE

Basin Expres Yolu Mehmet Akif Mah. Bahariye Cad. No:105
34303 K.Çekmece / İSTANBUL / TURKEY
Tel: +90 212 472 01 01
Fax: +90 212 612 79 65




FACTORY

Konya Ankara Yolu. Havaalanı Kavşağı
No: 213
42100 Selçuklu / KONYA
Tel: +90 332 358 01 01
Fax: +90 332 358 09 00



OZ 5300 - IX

JACKET and TROUSER POCKET FACINGS AUTOMAT

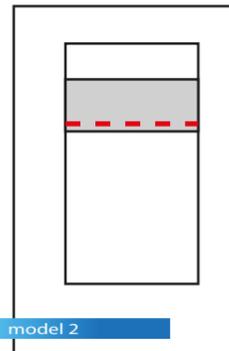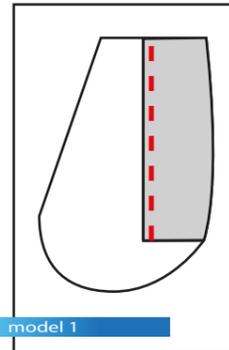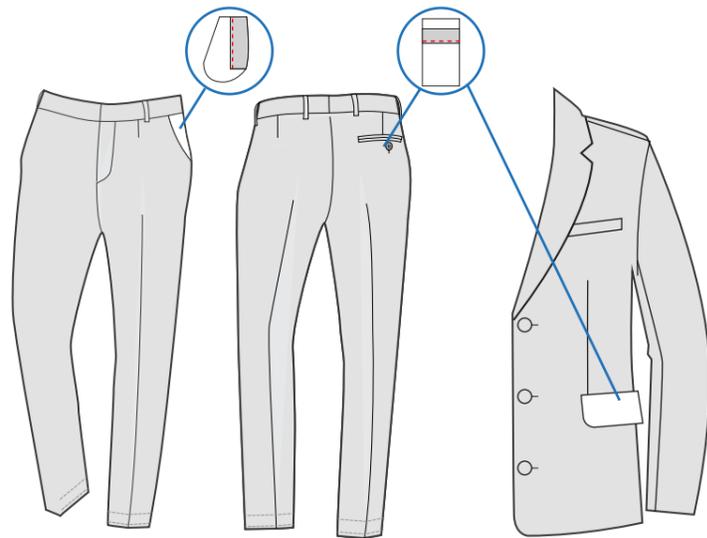

OZ 5300 - IX



OZ 5300 - IX



OZ 5300 - IX



OZ 5300 - IX

Max. Sewing Speeds : 4.500 r.p.m
Max. Stitch Length : 0,5 or 5 mm
Stitch type : 301 (Lockstitch)
Connection Voltage: Single-Phase A.C. 230 V, 50/60 Hz
Air Pressure : 6 bar

OZ 5300 - IX

JACKET and TROUSER POCKET FACINGS AUTOMAT

The OZ 5300-IX is a sewing machine with which all straight facing can be stitched efficiently and with good stitching quality on pocket pouches. Different top stitch width can be adjusted by an efficient folding device. The program enables sewing over the entire length of the pocket pouch as well as sewing only over the length of the facings.

TECHNICAL SPECIFICATIONS

- Brother Direct Drive Sewing Head
- Beijer Electronics, Windows Based 256 Million Colour Supported Touch Screen Control Panel
- Easy to use, with Pictures on the Operator Panel and with 50 Different Programming
- Sequential/Cycle Programming for Different jig Models
- PLC Control Unit
- Automatic Cycling Step Motor Unit to move the Jig
- Program support enabling Easy and Comfortable Jacket Flaps of Different Patterns
- Program supports easy and Comfortable working options for round, angled and Square Latch Ends for Trousers
- Possibility of programming for corner-stitches of Jigs and adjusting stitch steps
- Programmable start and end back tack or optionally adjustable stitch condensing
- Automatic thread trimming and cleaning system at the end of sewing
- Linear Motor Control, Edge Cutting System
- Ability to fix the Jig length (stitch) from panel either with photocell or mm
- Ability to make front and end cutting in stitch start and end, stitch side cuts
- Ability cutting- width (after sewing edge) between 3.3mm and 6 mm
- Suction Unit for Cutting waste with waste Collection Chamber
- Jig Ejection upon finish
- Error Detecting Systems
- Thread monitor

OPTIONS

- Extra Reference Laser
- Vacuum Motor
- Folding Station featuring 450 mm sewing as optional

PERFORMANCE

3500-4000 Pocket facings/ B Hours

DIMENSIONS

- Length : 140 cm
- Width : 90 cm
- Height : 140 cm
- Packing Size : 164 cm x 94 cm x 145 cm
- Machine Net Weight : approx. 200 kg
- Machine Gross Weight : approx. 240 kg